






1000W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

5050 LUMILED SERIES


BMP-5STAD25-1000-150V-10D4




SPECIFICATIONS	
System Power	1000w
Milliamps	50400Ma (184V X 4pcs
LED type	LUMILED 5050 96Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	4000k(3000k,5700kopt)
Luminous Flux	135,000 Lumens
Luminous Efficacy	135 Lm/w
CRI	Ra80 (Ra70/90 optional)
Beam Angle	25X25, 40X40, 60X60
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Inventronics Flicker free ESM240S150DG x 4pcs
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP, TM21, LM80, L70
Lamp Dimension	705 x 645 x 220 mm
Net Weight	19.3kg + 4.6kg drivers
Warranty	5 years drivers, 10 years Modules
Certification	JAS/ANZ TUV

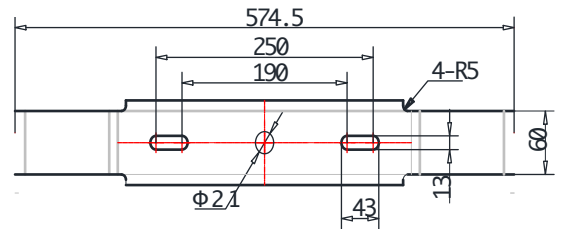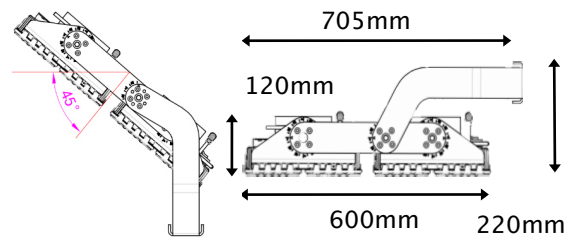

25X25 B/Angle
BMP-5STAD25-1000-1504-10D4



40X40 B/Angle
BMP-5STAD40-1000-1504-10D4



60X60 B/Angle
BMP-5STAD60-1000-15054-10D4



1000W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

5050 LUMILED SERIES

BMP-5STAD25-1000-150V-10D4

For accessories, contact BMP LED via
www.bmpled.com.au/contact

ACCESSORIES




Light Shields
BMP-FL40SHIELD-10



Red Laser pointer
BMP-REDLPOINT-10



Driver Extension Cable
2.0m,5.0m,12.0 lengths
BMP-DEC/2/5/12-10

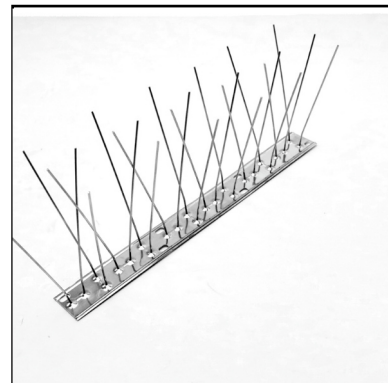

Birdspikes
0.33m
BMP-BIRDSPIKES-10