






1200W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

5050 LUMILED SERIES


BMP-5STADV-1200-150V-10D4



SPECIFICATIONS	
System Power	1200w
Milliamps	6000Ma (184V x 6pcs)
LED type	LUMILED 5050 96Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	4000k(3000k,5700kopt)
Luminous Flux	169,200 Lumens
Luminous Efficacy	141 Lm/w
CRI	Ra80 (Ra70/90 optional)
Beam Angle	25X25, 40X40, 60X60
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Inventronics Flicker free ESM-240150DG x6pcs
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP,TM21,LM80, L70
Lamp Dimension	900 x 645 x 220 mm
Net Weight	29.7kg + 6.0kg drivers
Warranty	5 years drivers,10 years Modules
Certification	JAS/ANZ TUV

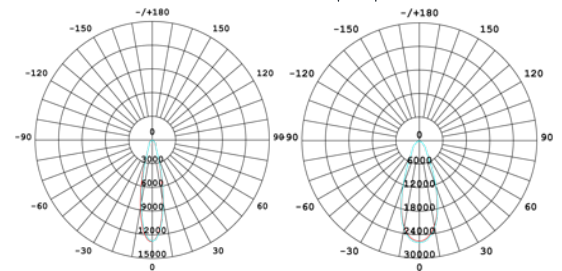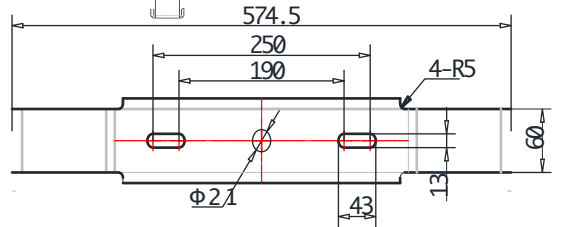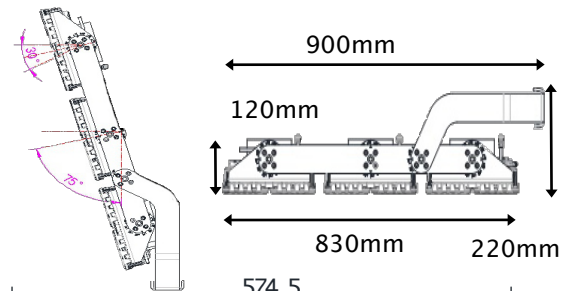

25X25 B/Angle BMP-5STAD25-1200-1504-10D4
40X40 B/Angle BMP-5STAD25-1200-1504-10D4

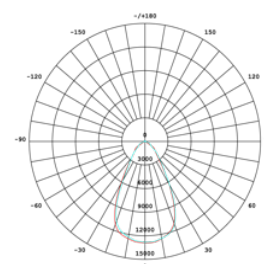

60X60 B/Angle
BMP-5STAD60-1200-15054-10D4



1200W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

5050 LUMILED SERIES

BMP-5STAD25-1200-150V-10D4

For accessories, contact BMP LED via
www.bmpled.com.au/contact

ACCESSORIES




Light Shields
BMP-FL40SHIELD-10



Red Laser pointer
BMP-REDLPOINT-10



Driver Extension Cable
2.0m,5.0m,12.0 lengths
BMP-DEC/2/5/12-10

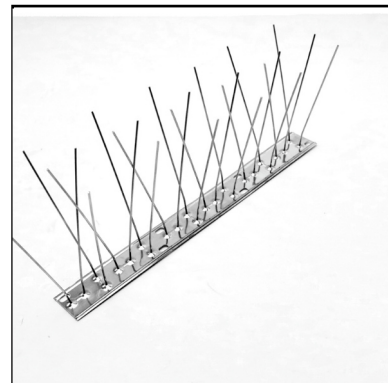

Birdspikes
0.33m
BMP-BIRDSPIKES-10