






# 300W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

5050 LUMILEDS SERIES

BMP-5STADV-300-150V-10D4




SPECIFICATIONS	
System Power	300w
Milliamps	770Ma 368v
LED type	LUMILEDS 5050 96Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	4000k(3000k,5700kopt)
Luminous Flux	44,100 Lumens
Luminous Efficacy	147 Lm/w
CRI	Ra80 (Ra70/90 optional)
Beam Angle	114X17, 45X12, 12X12 Horizontal
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	INVENTRONICS FLICKER FREE ESM-320S105DG
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP,TM21,LM80, L70
Lamp Dimension	335 x 600 x 220 mm
Net Weight	9.6kg + 1.7kg drivers
Warranty	5 years drivers,10 years Modules
Certification	JAS/ANZ TUV

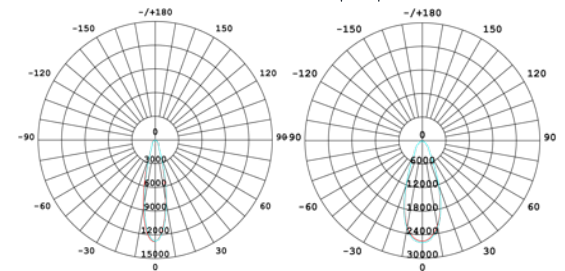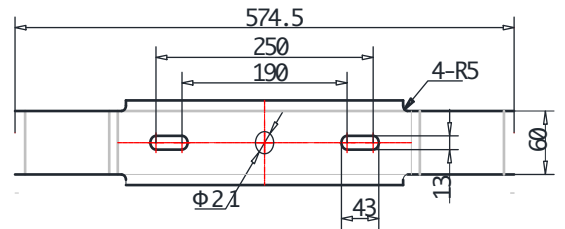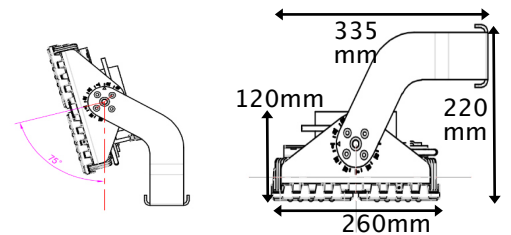

25x25 B/Angle  
BMP-5STAD25-300-1504-10D4

40x40 B/Angle  
BMP-5STAD40-300-1504-10D4



12x12 B/Angle  
BMP-5STAD60-300-15054-10D4



# 300W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

5050 LUMILEDS SERIES

BMP-5STADV-300-150V-10D4

For accessories, contact BMP LED via  
[www.bmpled.com.au/contact](http://www.bmpled.com.au/contact)

## ACCESSORIES




Light Shields  
BMP-FL40SHIELD-10



Red Laser pointer  
BMP-REDLPOINT-10



Driver Extension Cable  
2.0m,5.0m,12.0 lengths  
BMP-DEC/2/5/12-10

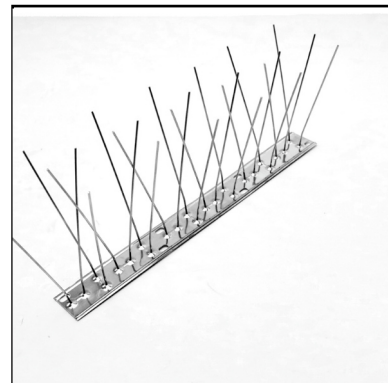

Birdspikes  
0.33m  
BMP-BIRDSPIKES-10