






# 800W MODULE SPORTGROUND DALI SERIES 4 15V (3 PHASE)

5050 LUMILED SERIES


BMP-5STAD25-800-150V-10D4



SPECIFICATIONS	
System Power	800w
Milliamps	4000Ma (184Vx4pcs)
LED type	LUMILED 5050 96Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	4000k(3000k,5700kopt)
Luminous Flux	112,800 Lumens
Luminous Efficacy	141 Lm/w
CRI	Ra80 (Ra70/90 optional)
Beam Angle	25X25, 40X40, 60X60 Horizontal
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Inventronics Flicker Free ESM-240S150DG x 4pcs
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP, TM21, LM80, L70
Lamp Dimension	705 x 645 x 220 mm
Net Weight	19.3kg + 4.0kg drivers
Warranty	5 years drivers, 10 years Modules
Certification	JAS/ANZ TUV

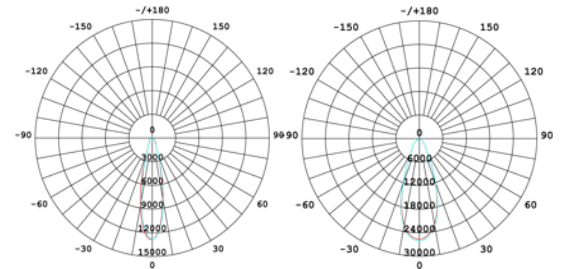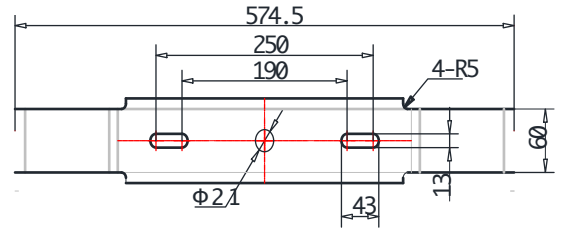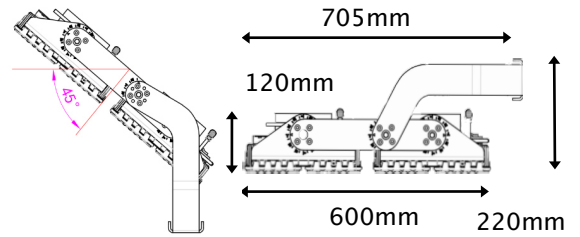

25X25 B/Angle **BMP-5STAD25-800-1504-10D4**  
40X40 Angle **BMP-5STAD40-800-1504-10D4**

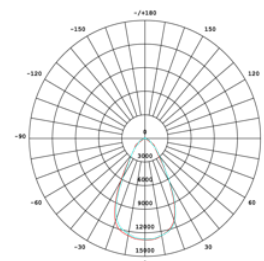

12x12 B/Angle **BMP-5STAD60-800-15054-10D4**



# 800W MODULE SPORTGROUND DALI SERIES 415V (3PHASE)

5050 LUMILED SERIES

BMP-5STAD25-800-150V-10D4

For accessories, contact BMP LED via  
[www.bmpled.com.au/contact](http://www.bmpled.com.au/contact)

## ACCESSORIES




Light Shields  
BMP-FL40SHIELD-10



Red Laser pointer  
BMP-REDLPOINT-10



Driver Extension Cable  
2.0m,5.0m,12.0 lengths  
BMP-DEC/2/5/12-10

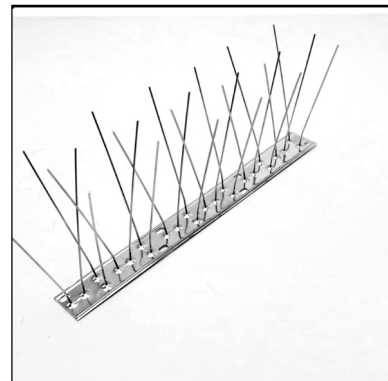

Birdspikes  
0.33m  
BMP-BIRDSPIKES-10