



120W 3 MODULE SURFACE MOUNT SERIES



BMP-SCAN-120-15057-10

- White
- Grey
- Black




SPECIFICATIONS


| | |
|-----------------------|----------------------------------|
| System Power | 120w |
| Milliamps | 800Ma |
| LED type | LUMILEDS 5050 28Pcs each Module |
| Lamp Body Material | Powdercoated Aluminium Alloy |
| Colour Temperature | 5700k(3000k,4000kopt) |
| Luminous Flux | 20,280lumens |
| Luminous Efficacy | 169lm/w |
| CRI | Ra70 (Ra80/90 optional) |
| Beam Angle | 90x90,120X120,90x40, 40x40, |
| Rated Lifespan | >100,000 hours Modules |
| IP Rating | IP67 Housing , IP68 Modules |
| Impact rating | IK09 |
| Driver Type | Moso Flicker Free X6-150M214 |
| Operating Temperature | -40°C ~ 50°C |
| Dimmable | PWM Dimming |
| Test Reports | ISMT,LCP, TM21, LM80, L70 |
| Lamp Dimension | 375 x 375 x 135 mm |
| Net Weight | 6.0kg |
| Warranty | 5 years driver, 10 years Modules |
| Certification | JAS/ANZ TUV |

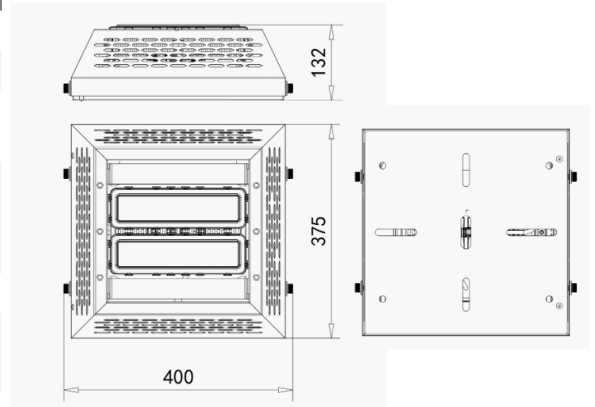


90x90 B/Angle
BMP-3SCAN90-120-15057-10



120x120 B/Angle
BMP-3SCAN120-120-15057-10



90x40 B/Angle
BMP-3SCAN2211-120-15057-10



Tunnel Module
BMP-3SCAN2123-120-15057-10



120W 3 MODULE SURFACE MOUNT SERIES


BMP-3SCAN-120-15057-10

For accessories, contact BMP LED via
www.bmp-led.com.au/contact


ACCESSORIES



Driver Extension Cable
2.0m, 5.0m, 12.0 lengths
BMP-DEC/2/5/12-10

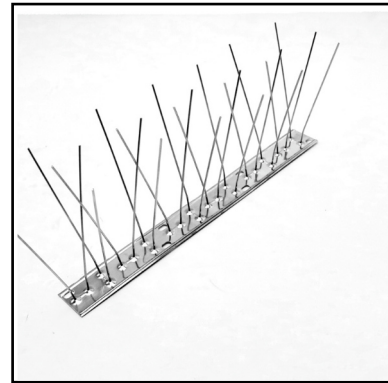

Birdspikes
0.33m
BMP-BIRDSPIKES-10

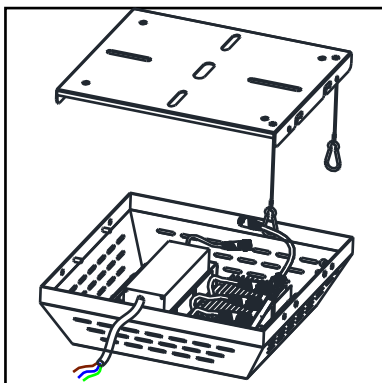

Mounting diagram

