



36W SLIM EMERGENCY WEATHERSEALED BATTEN


3CCT

BMP-EMBSWS12-36-135V-69LI




SPECIFICATIONS

System Power	36w
Milliamps	550Ma
LED type	2835 SMD
Lamp Body Material	Polycarbonate Base and Cover
Colour Temperature	TriCCT, 3000k , 4000k , 5700K
Luminous Flux	3000K, 4140 Lumens 4000K, 4860 Lumens 5700K, 4320 Lumens
Luminous Efficacy	115 - 135 Lm/w
CRI	Ra80 (Ra90 optional)
Beam Angle	120 x 120
Rated Lifespan	>50,000 hours
IP Rating	IP66 Housing
Impact rating	IK08
Driver Type	Isolated Class 1 Flicker free, Tridonic
Operating Temperature	-20°C ~ 40°C
Battery	Li-FeP04, 6.4V, 1.5Ah, 18650
Test Reports	LM80, LM70
Lamp Dimension	1225 x 83 x 80 (H) mm
Net Weight	1.6kg
Warranty	5 years driver
Certification	JAS/ANZ TUV

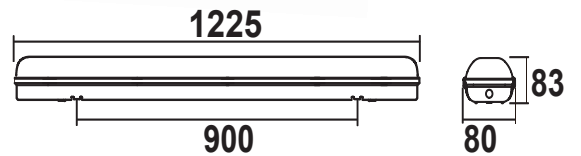

PA16H Large terminal Block

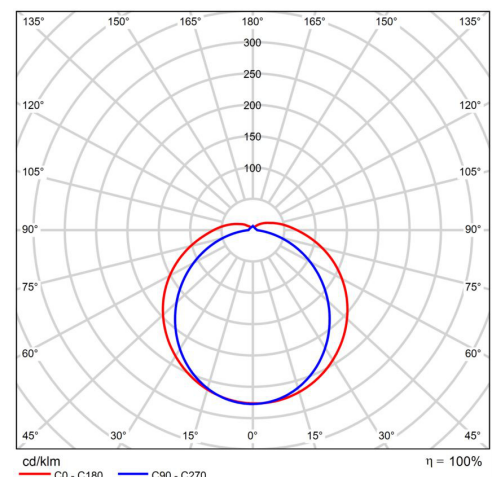

120x120⁰ B/Angle