



# 100W 2 MODULE MODULAR FLOODLIGHT SERIES




BMP-FLMODV-100-150V-10

- White
- Grey
- Black




## SPECIFICATIONS


System Power	100w
Milliamps	1000Ma
LED type	LUMILEDS 5050 28Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	5700k(3000k,4000kopt)
Luminous Flux	16,000lumens
Luminous Efficacy	160lm/w
CRI	Ra70 (Ra80/90 optional)
Beam Angle	90x90,90x40,25x25, 40x40,160x40Vertical
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Moso Flicker Free X6-M105150
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP, TM21,LM80, L70
Lamp Dimension	360 x 200 x 175 mm
Net Weight	4.7kg
Warranty	5 years driver, 10 years Modules
Certification	JAS/ANZ TUV

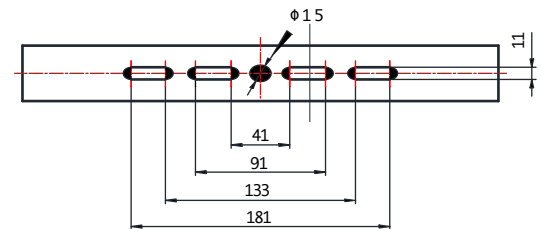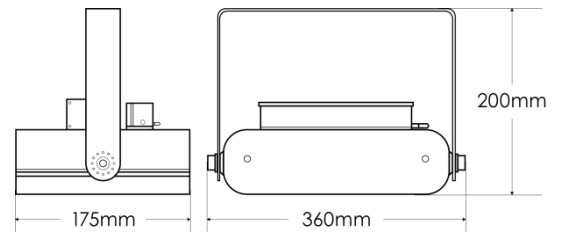


90x90 B/Angle  
BMP-FLMOD90-100-15057-10



90x40 B/Angle  
BMP-FLMOD2211-100-15057-10



25x25 B/Angle  
BMP-FLMOD25-100-15057-10



150x90 B/Angle  
BMP-FLMOD7530-100-15057-10

*See modular Photometric for additional beam Angles*



# 100W 2 MODULE MODULAR FLOODLIGHT SERIES


BMP-FLMODV-100-150V-10

For accessories, contact BMP LED via  
[www.bmpled.com.au/contact](http://www.bmpled.com.au/contact)

## ACCESSORIES



Driver Extension Cable  
2.0m,5.0m,12.0 lengths  
BMP-DEC/2/5/12-10

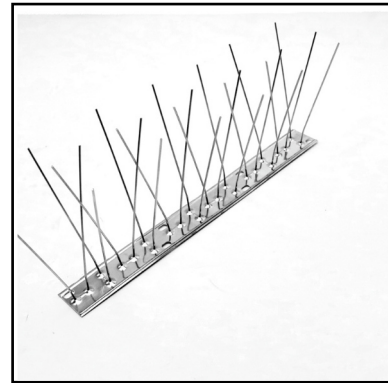

Birdspikes  
0.33m  
BMP-BIRDSPIKES-10



Red Laser pointer  
BMP-REDLPOINT-10

