







800W 16 MODULE MODULAR FLOODLIGHT SERIES

BMP-FLMODV-800-150V-10




SPECIFICATIONS

System Power	800w
Milliamps	1000Ma
LED type	LUMILEDS 5050 28Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	5700k(3000k,4000kopt)
Luminous Flux	132,050lumens
Luminous Efficacy	165lm/w
CRI	Ra70 (Ra80/90 optional)
Beam Angle	90x40,90x90,25x25, 60x60
Rated Lifespan	> 100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Moso Flicker Free X6-200M286 x 4
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP,TM21,LM80, L70
Lamp Dimension	680 x 650 x 490 mm
Net Weight	36.4kg
Warranty	5 years driver, 10 years Modules
Certification	JAS/ANZ TUV

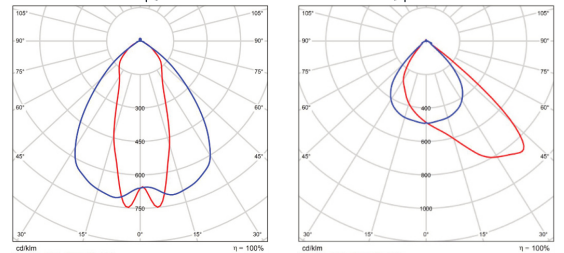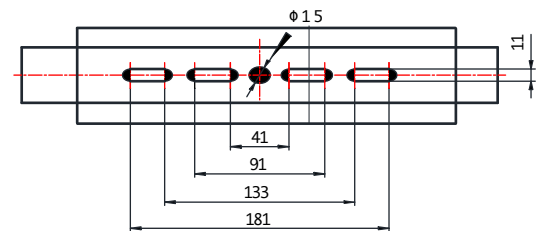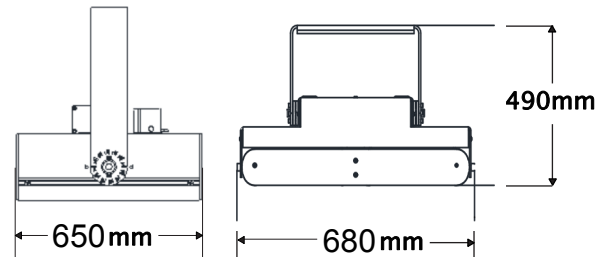

BMP-FLMOD2211-800-15057-10 BMP-FLMOD2212-800-15057-10

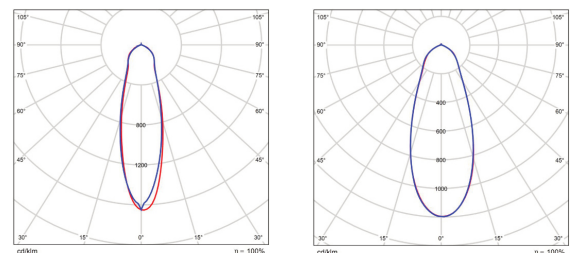

BMP-FLMOD25-800-15057-10 BMP-FLMOD40-800-15057-10

See modular Photometric for additional beam Angles



800W 16 MODULE MODULAR FLOODLIGHT SERIES


BMP-FLMODV-800-150V-10

For accessories, contact BMP LED via
www.bmp-led.com.au/contact

ACCESSORIES



Driver Extension Cable
2.0m, 5.0m, 12.0 lengths
BMP-DEC/2/5/12-10

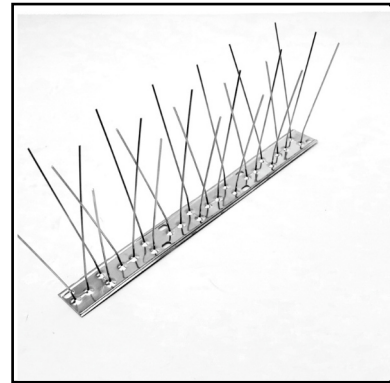

Birdspikes
0.33m
BMP-BIRDSPIKES-10



Red Laser pointer
BMP-REDLPOINT-10

