480W 8 MODULE MODULAR HIBAY SERIES

BMP-HBV-480-150V-10

White
Grey
Black

SPECIFICATIONS

System Power	480w
Milliamps	1200Ma
LED type	LUMILEDS 5050 28Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	5700k(3000k,4000kopt)
Luminous Flux	72,000lumens
Luminous Efficacy	150lm/w
CRI	Ra70 (Ra80/90 optional)
Beam Angle	90x90,90x40,60X60, 40x40
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Moso Flicker Free X6-240M229 x 2
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP,TM21,LM80, L70
Lamp Dimension	910x330x335 mm
Net Weight	17.0kg
Warranty	5 years driver, 10 years Modules
Certification	JAS/ANZ TUV

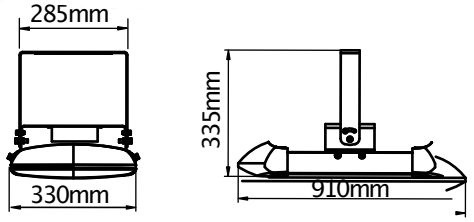

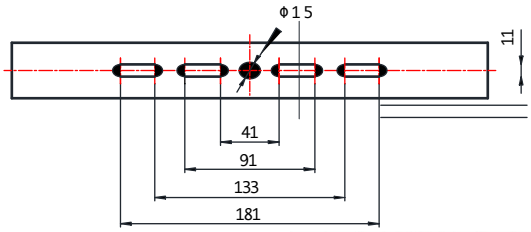



90x90 B/Angle
BMP-HB90-480-150V-10



90x40 B/Angle
BMP-HB2211-480-150V-10

Pallet racking isles



60x60 B/Angle
BMP-HB60-480-150V-10



40x40 B/Angle
BMP-HB40-480-150V-10

See modular Photometric for additional beam Angles

480W 8 MODULE MODULAR HIBAY SERIES

BMP-HBV-480-150V-10

For accessories, contact BMP LED via
www.bmpled.com.au/contact

ACCESSORIES

Driver Extension Cable
2.0m,5.0m,12.0 lengths
BMP-DEC/2/5/12-10

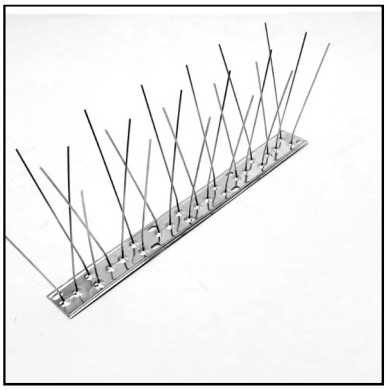

Birdspikes
0.33m
BMP-BIRDSPIKES-10