




100W 2 MODULE DALI SURFACE MOUNT SERIES



BMP-SCAN-100-15057-10D




2module series has blanking plate in centre

SPECIFICATIONS


System Power	100w
Milliamps	800Ma
LED type	LUMILEDS 5050 28Pcs each Module
Lamp Body Material	Powdercoated Aluminium Alloy
Colour Temperature	5700k(3000k,4000kopt)
Luminous Flux	16,000lumens
Luminous Efficacy	160lm/w
CRI	Ra70 (Ra80/90 optional)
Beam Angle	90x90,120X120,90x40, 40x40,
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Moso Flicker Free
Operating Temperature	-40°C ~ 50°C
Dimmable	Dali
Test Reports	ISMT,LCP, TM21, LM80, L70
Lamp Dimension	375 x 375 x 135 mm
Net Weight	5.8kg
Warranty	5 years driver, 10 years Modules
Certification	JAS/ANZ TUV

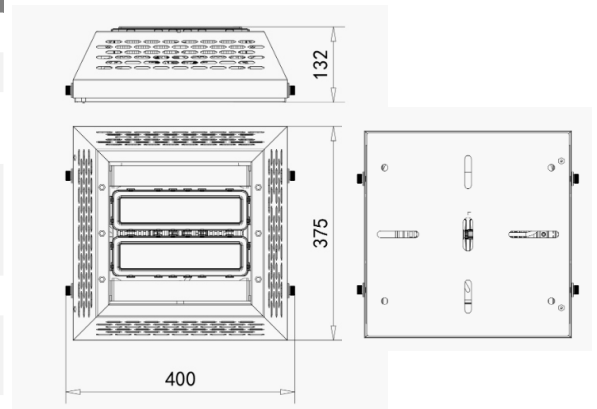


90x90 B/Angle
BMP-SCAN90-100-15057-10D



120x120 B/Angle
BMP-SCAN120-100-15057-10D



90x40 B/Angle
BMP-SCAN2211-100-15057-10D



Tunnel Module
BMP-SCAN2123-100-15057-10D



100W 2 MODULE DALI SURFACE MOUNT SERIES


BMP-SCAN-100-15057-10D

For accessories, contact BMP LED via
www.bmp-led.com.au/contact


ACCESSORIES



Driver Extension Cable
2.0m, 5.0m, 12.0 lengths
BMP-DEC/2/5/12-10

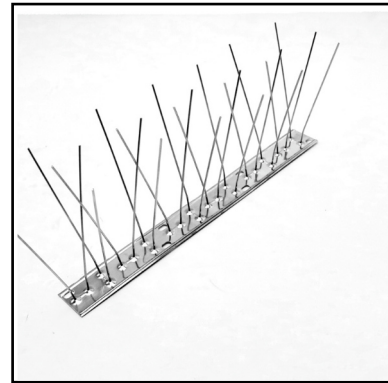

Birdspikes
0.33m
BMP-BIRDSPIKES-10

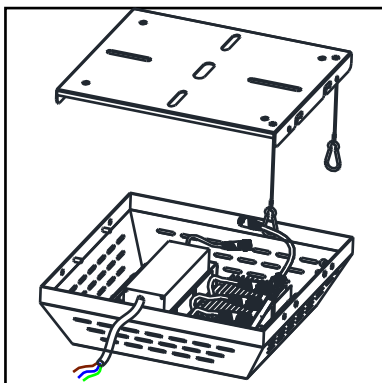

Mounting diagram