






# 150W 3 MODULE DALI SURFACE MOUNT SERIES

BMP-SCAN-150-15057-10D




## SPECIFICATIONS


System Power	150w
Milliamps	1000Ma
LED type	LUMILEDS 5050 28Pcs each Module
Lamp Body Material	Powdercoated Aluminium Alloy
Colour Temperature	5700k(3000k,4000kopt)
Luminous Flux	24,080lumens
Luminous Efficacy	160lm/w
CRI	Ra70 (Ra80/90 optional)
Beam Angle	90x90,120X120,90x40, 40x40,
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Moso Flicker Free
Operating Temperature	-40°C ~ 50°C
Dimmable	Dali
Test Reports	ISMT,LCP, TM21, LM80, L70
Lamp Dimension	375 x 375 x 135 mm
Net Weight	6.0kg
Warranty	5 years driver, 10 years Modules
Certification	JAS/ANZ TUV

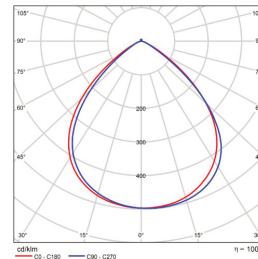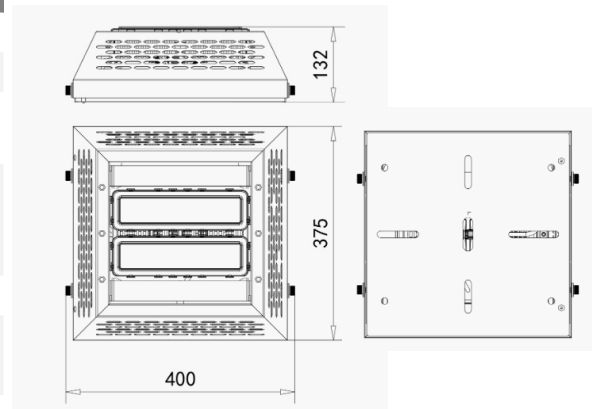


90x90 B/Angle  
BMP-SCAN90-150-15057-10D

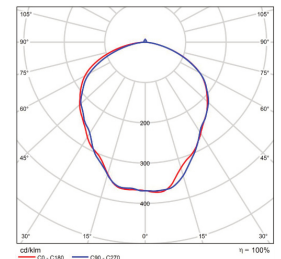

120x120 B/Angle  
BMP-SCAN150-150-15057-10D

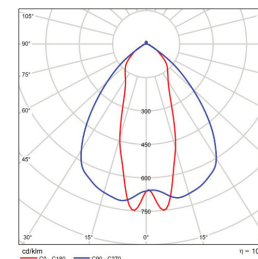

90x40 B/Angle  
BMP-SCAN2211-150-15057-10D

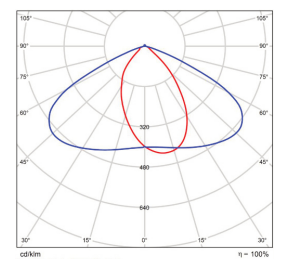

Tunnel Module  
BMP-SCAN2123-150-15057-10D



# 150W 3 MODULE DALI SURFACE MOUNT SERIES


BMP-SCAN-150-15057-10D

For accessories, contact BMP LED via [www.bmp-led.com.au/contact](http://www.bmp-led.com.au/contact)


## ACCESSORIES



Driver Extension Cable  
2.0m,5.0m,12.0 lengths  
BMP-DEC/2/5/12-10

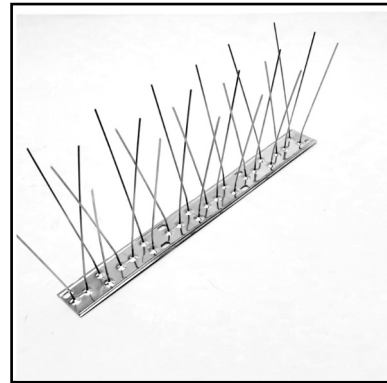

Birdspikes  
0.33m  
BMP-BIRDSPIKES-10

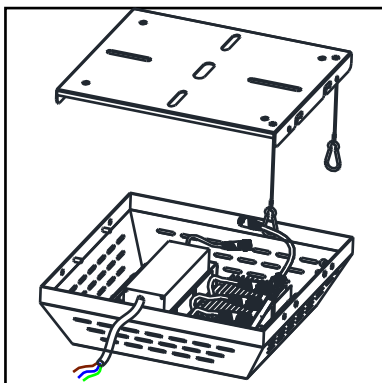

Mounting diagram

