



80W 2 MODULE SURFACE MOUNT SERIES

BMP-SCAN-80-15057-10



- White
- Grey
- Black




2module series has blanking plate in centre

SPECIFICATIONS


System Power	80w
Milliamps	800Ma
LED type	LUMILEDS 5050 28Pcs each Module
Lamp Body Material	Powdercoated Aluminium Alloy
Colour Temperature	5700k(3000k,4000kopt)
Luminous Flux	13,550lumens
Luminous Efficacy	169lm/w
CRI	Ra70 (Ra80/90 optional)
Beam Angle	90x90,120X120,90x40, 40x40,
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Moso Flicker Free X6-M1050150
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP, TM21, LM80, L70
Lamp Dimension	375 x 375 x 135 mm
Net Weight	5.8kg
Warranty	5 years driver, 10 years Modules
Certification	JAS/ANZ TUV

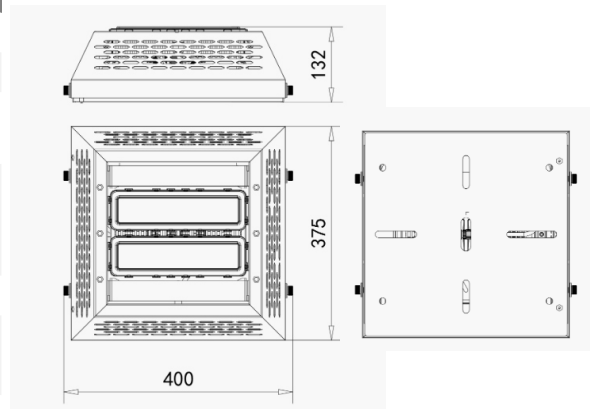


90x90 B/Angle
BMP-SCAN90-80-15057-10

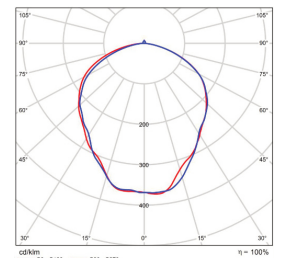

120x120 B/Angle
BMP-SCAN120-80-15057-10



90x40 B/Angle
BMP-SCAN2211-80-15057-10

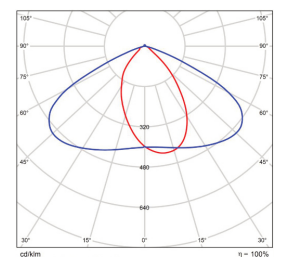

Tunnel Module
BMP-SCAN2123-80-15057-10



80W 2 MODULE SURFACE MOUNT SERIES


BMP-SCAN-80-15057-10

For accessories, contact BMP LED via
www.bmp-led.com.au/contact


ACCESSORIES



Driver Extension Cable
2.0m, 5.0m, 12.0 lengths
BMP-DEC/2/5/12-10

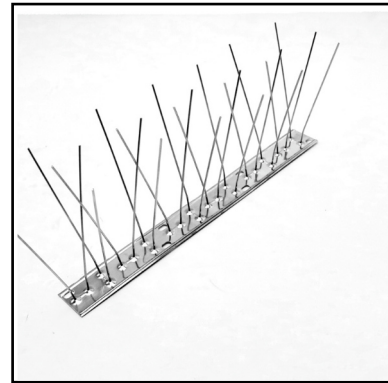

Birdspikes
0.33m
BMP-BIRDSPIKES-10

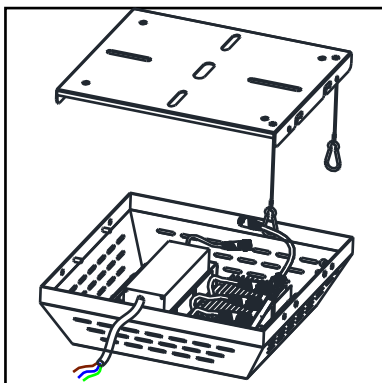

Mounting diagram

