




1200W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)




3535 LUXEON SERIES

BMP-STADLV-1200-150V-10D4




SPECIFICATIONS


| | |
|-----------------------|--|
| System Power | 1200w |
| Milliamps | 3900Ma |
| LED type | LUXEON 3535 96Pcs each Module |
| Lamp Body Material | Powdercoated Galvanised Steel |
| Colour Temperature | 4000k(3000k,5700kopt) |
| Luminous Flux | 162,050 Lumens |
| Luminous Efficacy | 135 Lm/w |
| CRI | Ra80 (Ra70/90 optional) |
| Beam Angle | 114X17, 45X12, 12X12 Horizontal |
| Rated Lifespan | > 100,000 hours Modules |
| IP Rating | IP67 Housing , IP68 Modules |
| Impact rating | IK09 |
| Driver Type | Inventronics Flicke Free ESM-240S105DGx6pcs Flicker Free |
| Operating Temperature | -40°C ~ 50°C |
| Dimmable | PWM Dimming |
| Test Reports | ISMT,LCP,TM21,LM80, L70 |
| Lamp Dimension | 900 x 645 x 220 mm |
| Net Weight | 29.7kg + 6.0kg drivers |
| Warranty | 5 years drivers,10 years Modules |
| Certification | JAS/ANZ TUV |

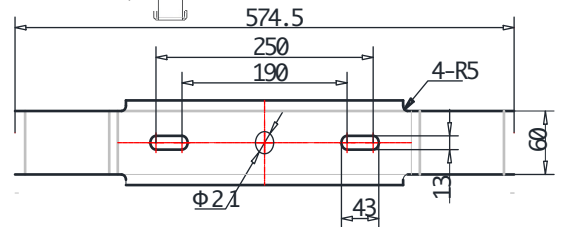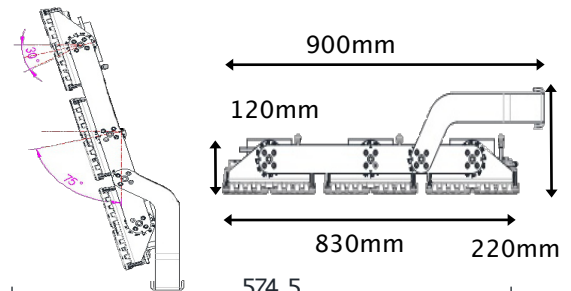

114x17 B/Angle
BMP-STADL1251-1200-150V-10D4



45x12 B/Angle
BMP-STADL2318-1200-150V-10D4



12x12 B/Angle
BMP-STADL12-1200-150V-10D4

See 5050 series for additional beam angles



1200W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

3535 LUXEON SERIES

BMP-STADLV-1200-150V-10D4

For accessories, contact BMP LED via
www.bmpled.com.au/contact

ACCESSORIES




Light Shields
BMP-FL40SHIELD-10



Red Laser pointer
BMP-REDLPOINT-10



Driver Extension Cable
2.0m,5.0m,12.0 lengths
BMP-DEC/2/5/12-10

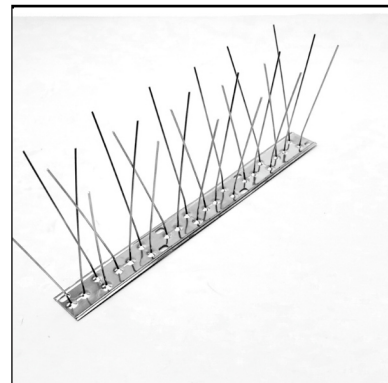

Birdspikes
0.33m
BMP-BIRDSPIKES-10