







500W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

3535 LUXEON SERIES


BMP-STADLV-500-150V-10D4



SPECIFICATIONS	
System Power	500w
Milliamps	1620Ma
LED type	LUMILED 5050 96Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	4000k(3000k,5700kopt)
Luminous Flux	67,550 Lumens
Luminous Efficacy	135 Lm/w
CRI	Ra80 (Ra70/90 optional)
Beam Angle	25X25, 40X40, 60X60
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Inventronics Flicker Free ESM-240S105DG x2pcs
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP, TM21, LM80, L70
Lamp Dimension	335 x 600 x 220 mm
Net Weight	9.6kg + 2.3kg
Warranty	5 years drivers, 10 years Modules
Certification	JAS/ANZ TUV

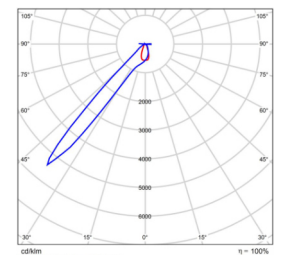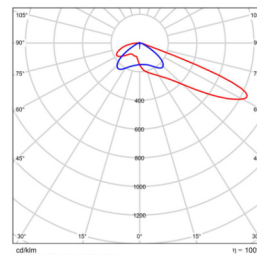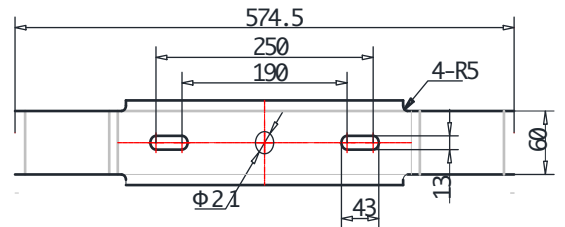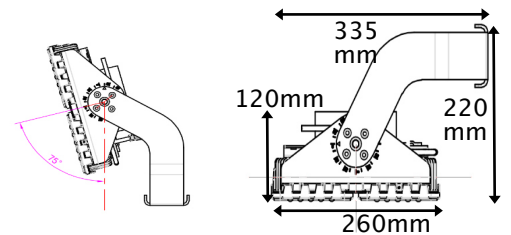

114x17 B/Angle **BMP-STADL1251-500-150V-10D4**
45x12 B/Angle **BMP-STADL2318-500-150V-10D4**



12x12 B/Angle **BMP-STADL12-500-150V-10D4**

See 5050 series for additional beam angles



500W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

3535 LUXEON SERIES

BMP-STADLV-500-150V-10D4

For accessories, contact BMP LED via
www.bmpled.com.au/contact

ACCESSORIES




Light Shields
BMP-FL40SHIELD-10



Red Laser pointer
BMP-REDLPOINT-10



Driver Extension Cable
2.0m,5.0m,12.0 lengths
BMP-DEC/2/5/12-10

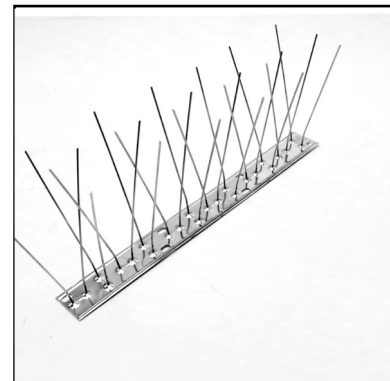

Birdspikes
0.33m
BMP-BIRDSPIKES-10