




800W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)





3535 LUXEON SERIES

BMP-STADLV-800-150V-10D4




SPECIFICATIONS

System Power	800w
Milliamps	2600Ma
LED type	LUXEON 3535 96Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	4000k(3000k,5700kopt)
Luminous Flux	108,050 Lumens
Luminous Efficacy	135 Lm/w
CRI	Ra80 (Ra70/90 optional)
Beam Angle	114X17, 45X12, 12X12 Horizontal
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Inventronics Flicker Free ESM-240S105DG x 4pcs
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP, TM21, LM80, L70
Lamp Dimension	705 x 645 x 220 mm
Net Weight	19.3kg + 4.0kg drivers
Warranty	5 years drivers, 10 years Modules
Certification	JAS/ANZ TUV

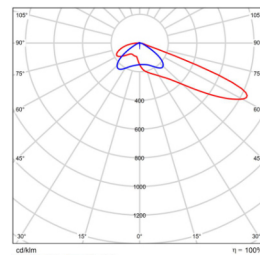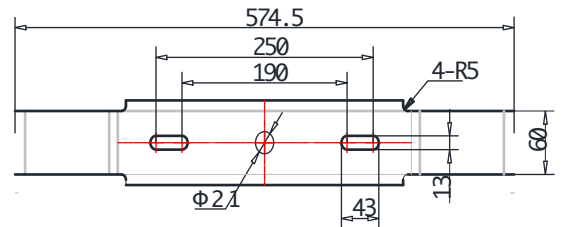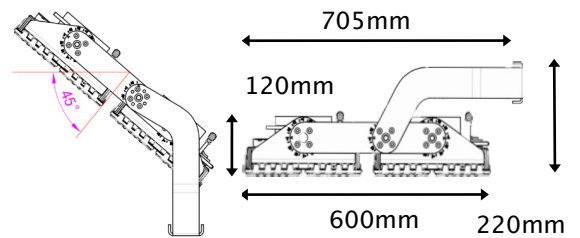

114x17 B/Angle **BMP-STADL1251-800-1504-10D4**
45x12 B/Angle **BMP-STADL2318-800-1504-10D4**

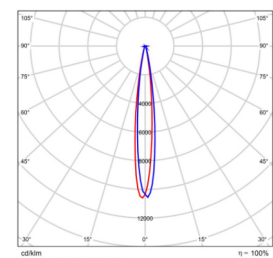

12x12 B/Angle **BMP-STADL12-800-15054-10D4**

See 5050 series for additional beam angles



800W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

3535 LUXEON SERIES

BMP-STADLV-800-150V-10D4

For accessories, contact BMP LED via
www.bmpled.com.au/contact

ACCESSORIES




Light Shields
BMP-FL40SHIELD-10



Red Laser pointer
BMP-REDLPOINT-10



Driver Extension Cable
2.0m,5.0m,12.0 lengths
BMP-DEC/2/5/12-10

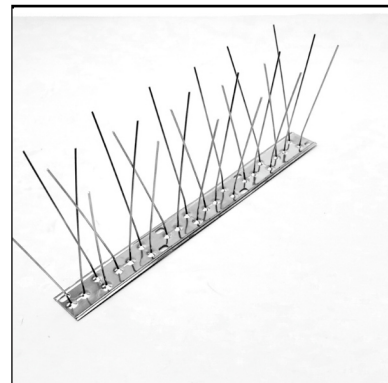

Birdspikes
0.33m
BMP-BIRDSPIKES-10