







# 1000W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

5050 LUMILED SERIES


BMP-5STADV-1000-150V-10D4




SPECIFICATIONS	
System Power	1000w
Milliamps	50400Ma
LED type	LUMILED 5050 96Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	4000k(3000k,5700kopt)
Luminous Flux	155,050 Lumens
Luminous Efficacy	155 Lm/w
CRI	Ra80 (Ra70/90 optional)
Beam Angle	25X25, 40X40, 60X60
Rated Lifespan	>100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	Inventronics Flicker free ESM240S150DG x 4pcs
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP, TM21, LM80, L70
Lamp Dimension	705 x 645 x 220 mm
Net Weight	19.3kg + 4.6kg drivers
Warranty	5 years drivers, 10 years Modules
Certification	JAS/ANZ TUV

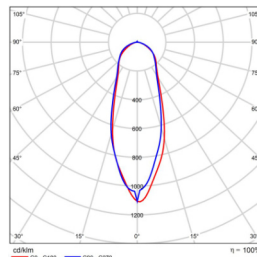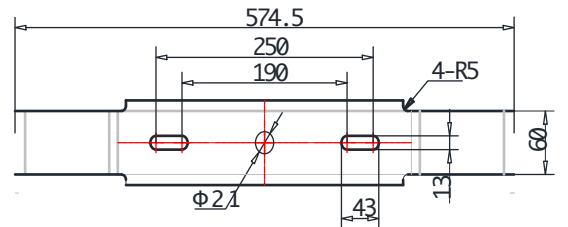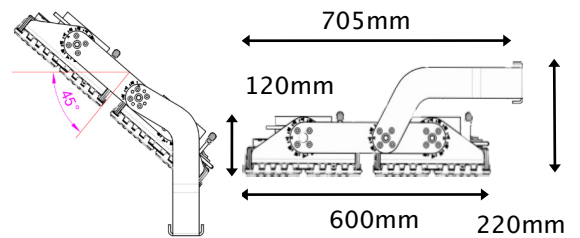

25 X 25 B/Angle  
BMP-STAD25-1000-150V-10D4



40x40 B/Angle  
BMP-STAD40-1000-150V-10D4



60x60 B/Angle  
BMP-STAD60-1000-150V-10D4

See 3535 series for additional beam angles



# 1000W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

5050 LUMILED SERIES

BMP-5STADV-1000-150V-10D4

For accessories, contact BMP LED via  
[www.bmpled.com.au/contact](http://www.bmpled.com.au/contact)

## ACCESSORIES




Light Shields  
BMP-FL40SHIELD-10



Red Laser pointer  
BMP-REDLPOINT-10



Driver Extension Cable  
2.0m,5.0m,12.0 lengths  
BMP-DEC/2/5/12-10

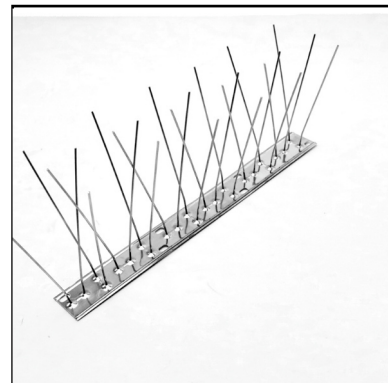

Birdspikes  
0.33m  
BMP-BIRDSPIKES-10