







300W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

5050 LUMILEDS SERIES


BMP-STADV-300-150V-10D4




SPECIFICATIONS	
System Power	300w
Milliamps	770Ma
LED type	LUMILEDS 5050 96Pcs each Module
Lamp Body Material	Powdercoated Galvanised Steel
Colour Temperature	4000k(3000k,5700kopt)
Luminous Flux	46,550 Lumens
Luminous Efficacy	155 Lm/w
CRI	Ra80 (Ra70/90 optional)
Beam Angle	25X25, 40X40, 60X60
Rated Lifespan	> 100,000 hours Modules
IP Rating	IP67 Housing , IP68 Modules
Impact rating	IK09
Driver Type	INVENTRONICS FLICKER FREE ESM-320S105DG
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	ISMT,LCP,TM21,LM80, L70
Lamp Dimension	335 x 600 x 220 mm
Net Weight	9.6kg + 1.7kg drivers
Warranty	5 years drivers,10 years Modules
Certification	JAS/ANZ TUV

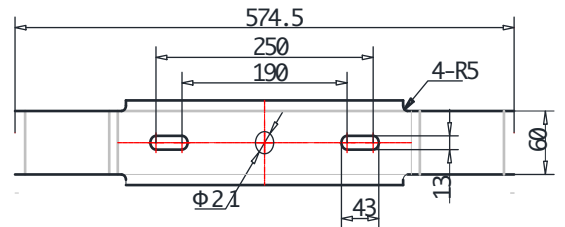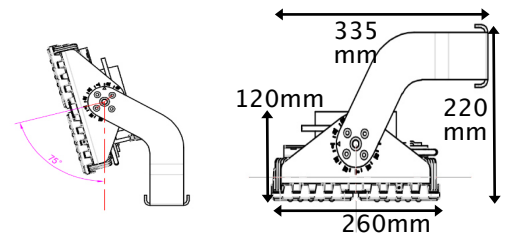

25 X 25 B/Angle
BMP-STAD25-300-150V-10D4

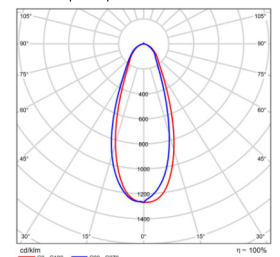

40x40 B/Angle
BMP-STAD40-300-150V-10D4

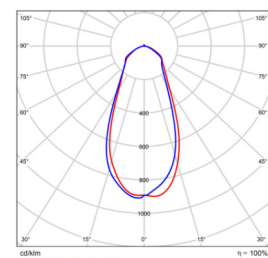

60x60 B/Angle
BMP-STAD60-300-150V-10D4

See 3535 series for additional beam angles



300W MODULE SPORTGROUND DALI SERIES 415V (3 PHASE)

5050 LUMILEDS SERIES

BMP-STADV-300-150V-10D4

For accessories, contact BMP LED via
www.bmpled.com.au/contact

ACCESSORIES




Light Shields
BMP-FL40SHIELD-10



Red Laser pointer
BMP-REDLPOINT-10



Driver Extension Cable
2.0m,5.0m,12.0 lengths
BMP-DEC/2/5/12-10

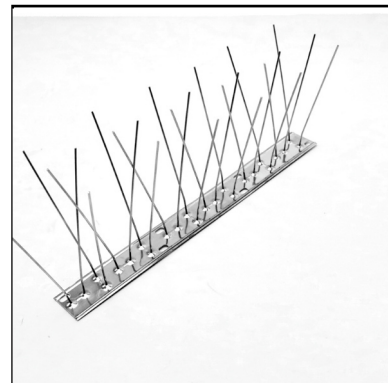

Birdspikes
0.33m
BMP-BIRDSPIKES-10