




180W 3 MODULE 24VDC STREETLIGHT LIGHT SERIES

BMP-STREET24VDC-180-150V-10

LED



SPECIFICATIONS

System Power	180w
Milliamps	1900Ma
LED type	LUMILEDS 5050 28Pcs each Module
Lamp Body Material	Aluminium Alloy
Colour Temperature	5700k,4000k,3000k
Luminous Flux	27,950lumens
Luminous Efficacy	155lm/w
CRI	Ra70(Ra80/90 Optional)
Beam Angle	TYPE I, II , III , IV , V

Light Distribution Curve	Various
--------------------------	---------

Rated Lifespan	>100,000 hours Modules
----------------	------------------------

IP Rating	IP66 Housing , IP68 Modules
-----------	-----------------------------

Impact rating	IK08
---------------	------

Driver Type	Flicker Free D5-175C-56-A
-------------	---------------------------

Operating Temperature	-40°C ~ 50°C
-----------------------	--------------

Dimmable	PWM Dimming
----------	-------------




Test Reports	TM21,LM80,L70
--------------	---------------

Lamp Dimension	705 x 330 x 155 mm
----------------	--------------------

Net Weight	9.6kg
------------	-------

Warranty	5 years driver, 10 years Modules
----------	----------------------------------

Certification	JAS/ANZ TUV
---------------	-------------

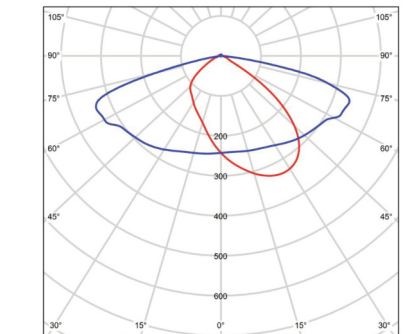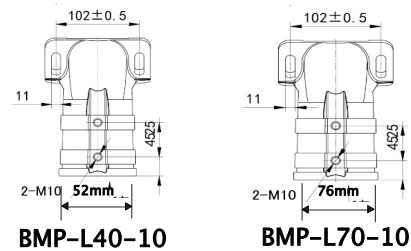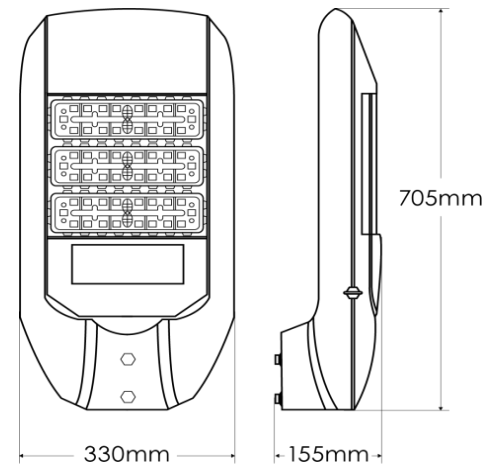

Type II (Most Common)
BMP-STREET24VDC2-180-150V-10

See next page for other distributions




180W 3 MODULE 24VDC STREETLIGHT LIGHT SERIES

BMP-STREET24VDC-180-150V-10


For accessories, contact BMP LED via www.bmpled.com.au/contact

ACCESSORIES



Type I


BMP-STREET24VDC1-180-150V-10



Type II


BMP-STREETV24DC2-180-150V-10

(Most Common)




Type III

BMP-STREET24VDC3-180-150V-10




Type IV

BMP-STREET24VDC4-180-150V-10



Type V

BMP-STREE24VDC5-180-150V-10

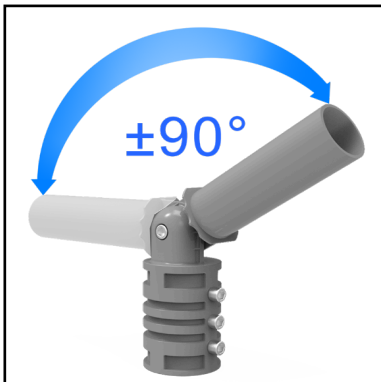


Streetlight pole Adaptor
Black/Grey/White Options
BMP-STREETAD-10(B/G/W)



3 Pin Phot Cell
Pe Cell and base
BMP-STREETCELL3-10



Driver Extension Cable
2.0m,5.0m,12.0 lengths
BMP-DEC/2/5/12-10

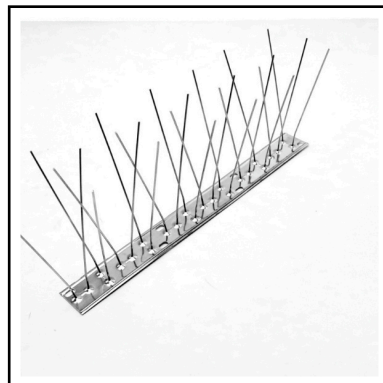

Birdspikes
0.33m
BMP-BIRDSPIKES-10