



60W 1 MODULE 24VDC STREETLIGHT LIGHT SERIES



BMP-STREET24VDC-60-150V-10

- White
- Grey
- Black




SPECIFICATIONS


System Power	60w
Milliamps	1170Ma 46v
LED type	LUMILEDS 5050 28Pcs each Module
Lamp Body Material	Aluminium Alloy
Colour Temperature	5700k,4000K,3000K
Luminous Flux	10,730lumens
Luminous Efficacy	178lm/w
CRI	Ra70(Ra90/90 Optional)
Beam Angle	TYPE I, II , III , IV , V
Light Distribution Curve	Various
Rated Lifespan	>100,000 hours Modules
IP Rating	IP66 Housing , IP68 Modules
Impact rating	IK08
Driver Type	Flicker Free D5-60C-56A
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	TM21,LM80,L70
Lamp Dimension	577 x 330 x 155 mm
Net Weight	7.2kg
Warranty	5 years driver, 10 years Modules
Certification	JAS/ANZ TUV

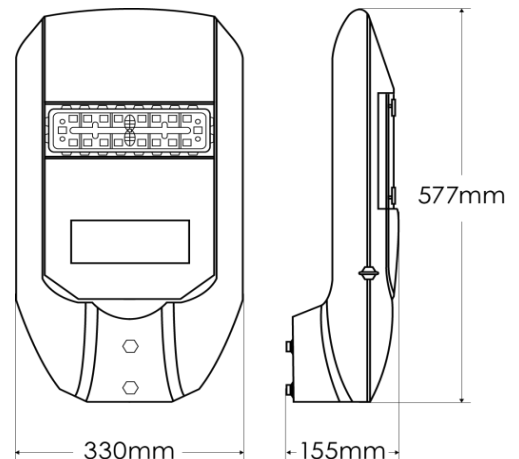

BMP-L40-10



BMP-L70-10

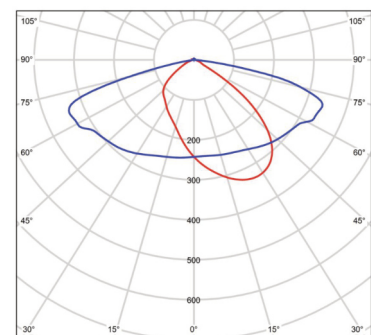

Type II (Most Common)
BMP-STREET24VDC2-60-150V-10

See next page for other distributions




60W 1 MODULE 24VDC STREETLIGHT LIGHT SERIES

BMP-STREET24VDC-60-150V-10


For accessories, contact BMP LED via www.bmpled.com.au/contact

ACCESSORIES

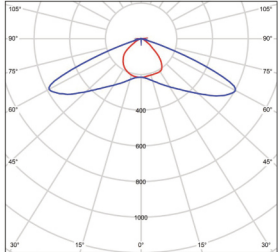

Type I


BMP-STREET24VDC1-60-150V-10



Type II


BMP-STREET24VDC2-60-150V-10

(Most Common)




Type III

BMP-STREET24VDC3-60-150V-10




Type IV

BMP-STREET24VDC4-60-150V-10



Type V

BMP-STREE24VDC5-60-150V-10

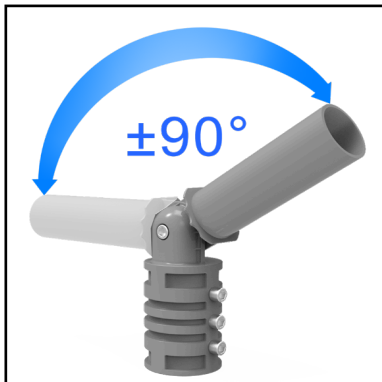


Streetlight pole Adaptor
Black/Grey/White Options
BMP-STREETAD-10(B/G/W)



3 Pin Phot Cell
Pe Cell and base
BMP-STREETCELL3-10



Driver Extension Cable
2.0m,5.0m,12.0 lengths
BMP-DEC/2/5/12-10

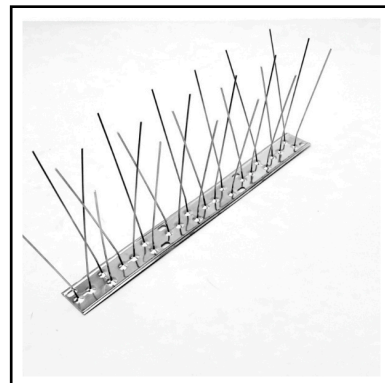

Birdspikes
0.33m
BMP-BIRDSPIKES-10