








# 300W 5 MODULE STREETLIGHT LIGHT SERIES

BMP-STREETM-300-150V-10



## SPECIFICATIONS

System Power	300w
Milliamps	1200Ma
LED type	LUMILEDS 5050 28Pcs each Module
Lamp Body Material	Aluminium Alloy
Colour Temperature	5700k,4000K,3000K
Luminous Flux	48,050lumens
Luminous Efficacy	160lm/w
CRI	Ra70(Ra90/90 Optional)
Beam Angle	TYPE I, II , III , IV , V
Light Distribution Curve	Various
Rated Lifespan	>100,000 hours Modules
IP Rating	IP66 Housing , IP68 Modules
Impact rating	IK08
Driver Type	Moso Flicker Free X6-150m214 x 2
Operating Temperature	-40°C ~ 50°C
Dimmable	PWM Dimming
Test Reports	TM21,LM80,L70
Lamp Dimension	945x330x155 mm
Net Weight	7.2kg
Warranty	5 years driver, 10 years Modules
Certification	JAS/ANZ TUV

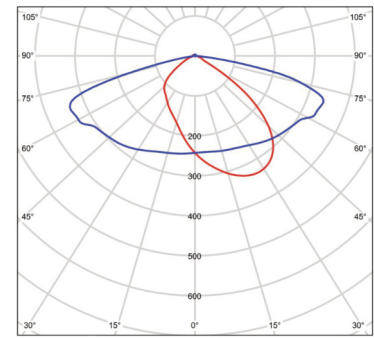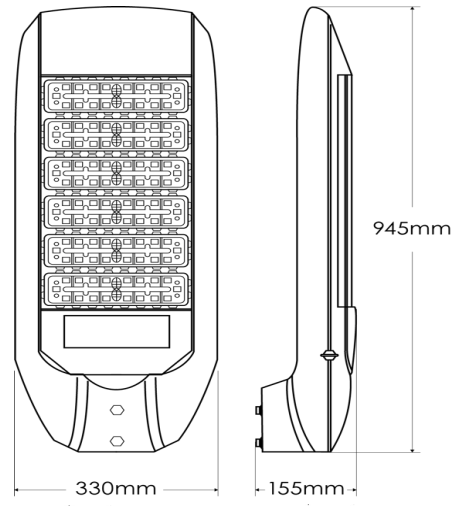

Type II (Most Common)  
BMP-STREET2-300-150V-10

**See next page for other distributions**








# 300W 5 MODULE STREETLIGHT LIGHT SERIES

BMP-STREETM-300-150V-10

For accessories, contact BMP LED via [www.bmpled.com.au/contact](http://www.bmpled.com.au/contact)

## ACCESSORIES

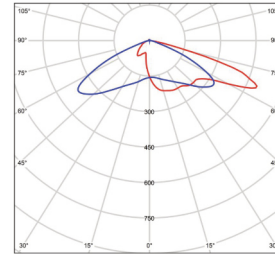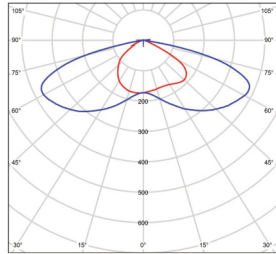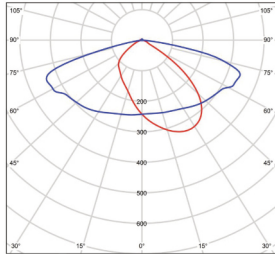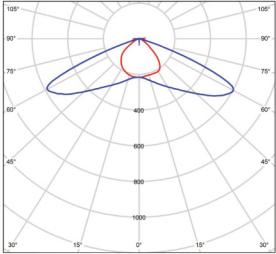

Type I

BMP-STREET1-300-150V-10

Type II

BMP-STREET2-300-150V-10  
(Most Common)

Type III


BMP-STREET3-300-150V-10

Type IV

BMP-STREET4-300-150V-10

Type V

BMP-STREET5-300-150V-10

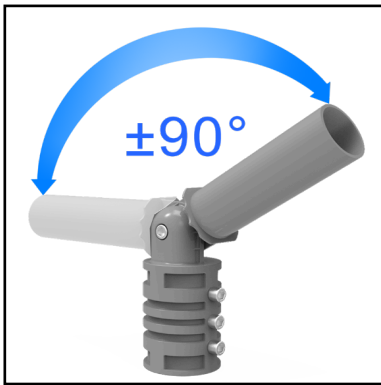


Streetlight pole Adaptor  
Black/Grey/White Options  
BMP-STREETAD-10(B/G/W)



3 Pin Phot Cell  
Pe Cell and base  
BMP-STREETCELL3-10



Driver Extension Cable  
2.0m,5.0m,12.0 lengths  
BMP-DEC/2/5/12-10

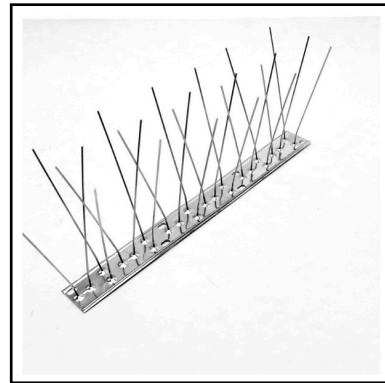

Birdspikes  
0.33m  
BMP-BIRDSPIKES-10