






40W CYANOSIS SIDE-LIT LED PANEL LIGHT

BMP-CYAN312-40-934-58



SPECIFICATIONS

System Power	43W
Milliamps	950Ma 33-40v
LED type	PCB Board, 252pcs, 4014 SMD
Lamp Body Material	Aluminium Shell
Diffuser	PMMA LGP & Micro Prismatic
Colour Temperature	4000K
Luminous Flux	4045lumens
Luminous Efficacy	120lm/w
MaCadam	5 step
CRI	> 80
Beam Angle	120 x 120
Rated Lifespan	> 50,000 hours
IP Rating	IP20
Driver Type	Optional Flicker Free
Operating Temperature	-20°C ~ 40°C
Dimmable	400Ma - 500Ma
Installation	Recessed / Suspended Surface Mount
Lamp Dimension	595 x 295 x 12.5 mm
Warranty	5 years
Certification	JAS/ANZ

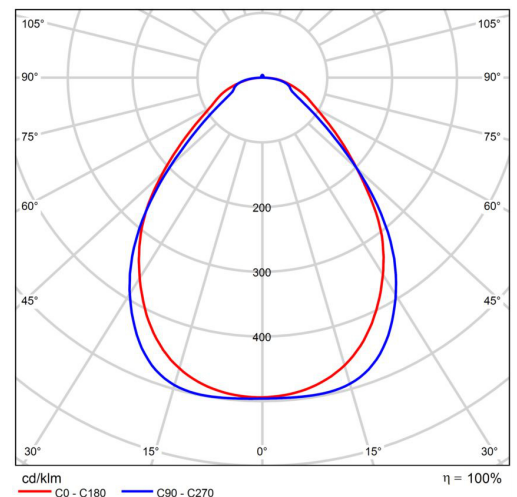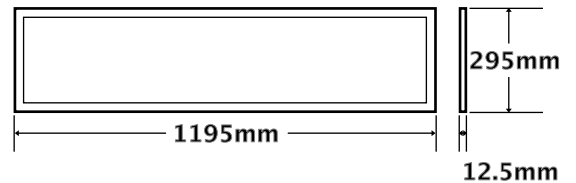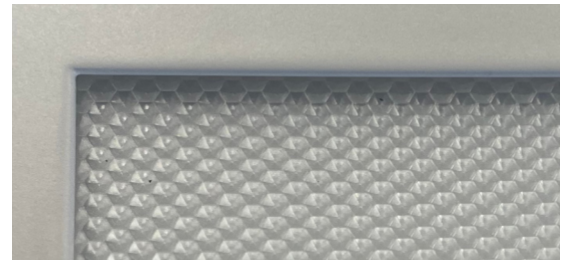

OPTIONS

- Suspension Kits
- Clean Room IP65 Enclosures
- Surface Mount Kits




40W CYANOSIS SIDE-LIT LED PANEL LIGHT


BMP-CYAN312-40-934-58

For accessories, contact BMP LED via
www.bmp-led.com.au/contact

ACCESSORIES

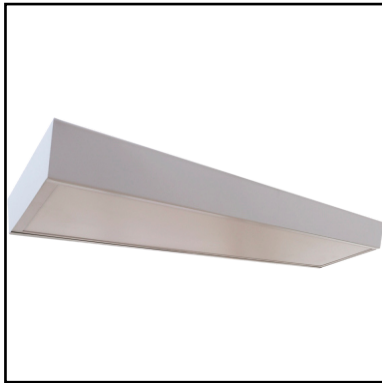

Surface Mount frame
Matt White
BMP-SL312-SURF-58

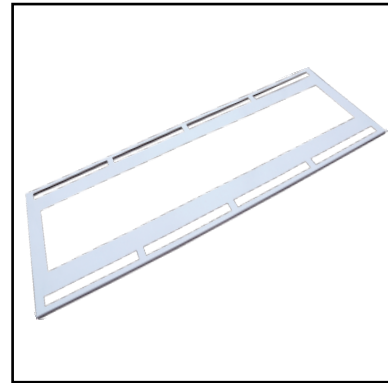

Air Slot recessed Frame
Matt White
BMP-SL312-AS-58



Plaster Recess Frame
Matt White
BMP-SL312-REC-58



Cleanroom IP65 Enclosure
Matt White
BMP-SL312-IP65CR-58




LED

40W CYANOSIS SIDE-LIT LED PANEL LIGHT


BMP-CYAN312-40-934-58

For accessories, contact BMP LED via
www.bmp-led.com.au/contact


ACCESSORIES




XXXX




XXXX




XXXX



XXXX



XXXX



XXXX